

# R.W. CONKLINSTEEL


100% Melted & Manufactured in the USA

1-888-CONKLIN (266-5546)

www.conklinsteel.com

# PERMISSIBLE VARIATIONS

H-Pile & Wide Flange

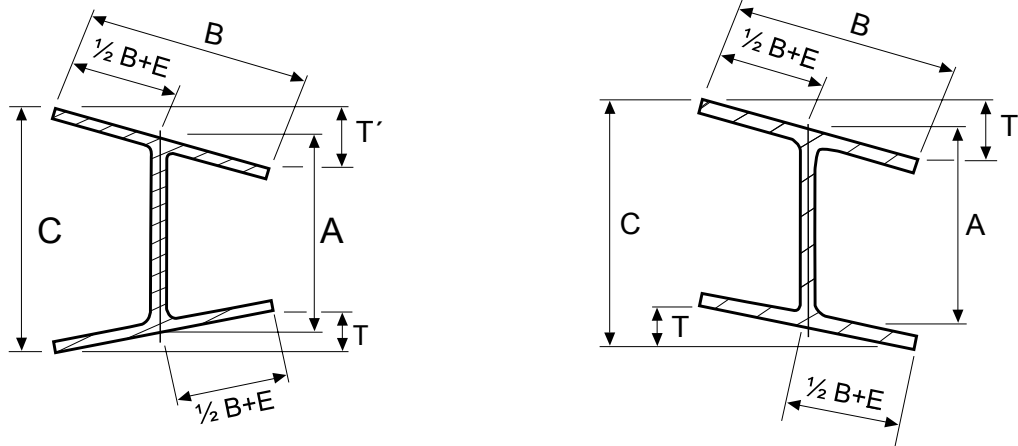

## PERMISSIBLE VARIATIONS IN CROSS SECTION

	Depth (A)		Flange Width (B)		T + 1'	E	Max (C)
	OVER THEORETICAL	UNDER THEORETICAL	OVER THEORETICAL	UNDER THEORETICAL	FLANGES OUT OF SQ. MAX	WEB OFF CENTER MAX	DEPTH AT ANY CROSS SECT. OVER THEORETICAL
All Sizes Up to 12-inch	1/8 inch	1/8 inch	1/4 inch	3/16 inch	1/4 inch	3/16 inch	1/4 inch
Sizes Over 12-inch	1/8 inch	1/8 inch	1/4 inch	3/16 inch	5/16 inch	3/16 inch	1/4 inch

A is measured at center line of web, B is measured parallel to flange, C is measured parallel to web

\*Through 426 lbs/ft, over 426 lbs/ft, 5/16-inch.

## PERMISSIBLE VARIATIONS IN LENGTH

### Variations from Specified Length for Lengths Given

	30-FOOT AND UNDER		OVER 30-FOOT	
	OVER THEORETICAL	UNDER THEORETICAL	OVER THEORETICAL	UNDER THEORETICAL
24-Inch and Under in Nominal Depth	1/8 inch	1/8 inch	3/8 plus 1/16 for each additional 5 feet or fraction thereof	3/8 inch
24-Inch in Nominal Length & Columns	1/2 inch	1/2 inch	1/2 plus 1/16 for each additional 5 feet or fraction thereof	1/2 inch

# R.W. CONKLINSTEEL



100% Melted & Manufactured in the USA

1-888-CONKLIN (266-5546)

www.conklinsteel.com

# PERMISSIBLE VARIATIONS

American Standard/Channel

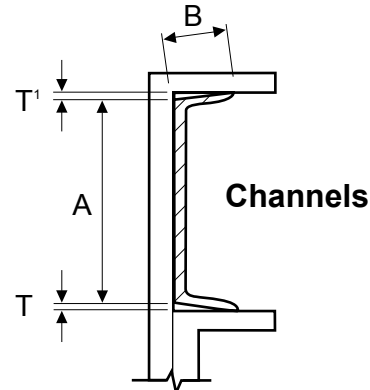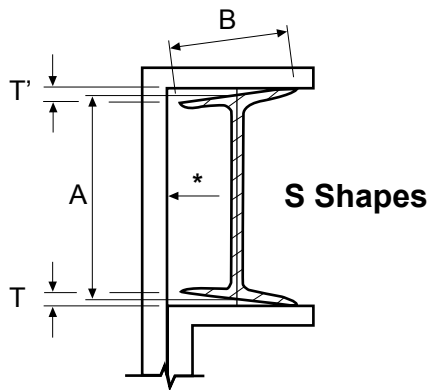

## PERMISSIBLE VARIATIONS IN CROSS SECTION

Sections	Nominal Size (Inches)	Depth (A)		Flange Width (B)		Max (C)
		OVER THEORETICAL	UNDER THEORETICAL	OVER THEORETICAL	UNDER THEORETICAL	OUT OF SQUARE PER INCH OF B IN INCHES
S Shapes	3 - 7	3/32-inch	1/16-inch	1/8-inch	1/8-inch	1/32-inch
	Over 7 - 14	1/8-inch	3/32-inch	5/32-inch	5/32-inch	1/32-inch
	Over 14	3/16-inch	1/8-inch	3/16-inch	3/16-inch	1/32-inch
Channel Shapes	3 - 7	3/32-inch	1/16-inch	1/8-inch	1/8-inch	1/32-inch
	Over 7 - 14	1/8-inch	3/32-inch	1/8-inch	5/32-inch	1/32-inch
	Over 14	3/16-inch	1/8-inch	1/8-inch	3/16-inch	1/32-inch

A is measured at center line of web

## PERMISSIBLE VARIATIONS IN LENGTH

### Variations from Specified Length for Lengths Given

	UP TO 30 FT (with 30 ft included)	OVER 30 FT TO 40 FT (with 40 ft included)	OVER 40 FT TO 50 FT (with 50 ft included)	OVER 50 FT TO 65 FT (with 65 ft included)	OVER 65 FT (with 40 ft included)
	OVER THEORETICAL	OVER THEORETICAL	OVER THEORETICAL	OVER THEORETICAL	OVER THEORETICAL
S Shapes & Channels	2 inches	2 inches	2 inches	2 inches	2 inches
	UNDER THEORETICAL	UNDER THEORETICAL	UNDER THEORETICAL	UNDER THEORETICAL	UNDER THEORETICAL
S Shapes & Channels	N/A	N/A	N/A	N/A	N/A

# R.W. CONKLINSTEEL


100% Melted & Manufactured in the USA

1-888-CONKLIN (266-5546)

www.conklinsteel.com

# PERMISSIBLE VARIATIONS

H-Pile/Wide Flange/Standard/Channel

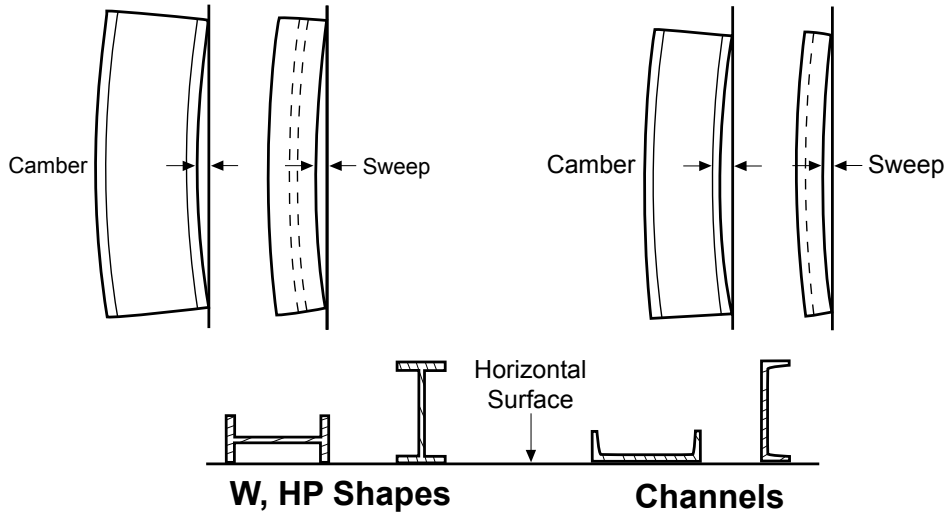

## PERMISSIBLE VARIATIONS IN CAMBER & SWEEP

Permissible Variations in Inches			
Sizes	Length	CAMBER	SWEEP
Sizes with flange width equal to or greater than 6 inches	All	$\frac{1/8" \times \text{total length (in feet)}}{10}$	
Sizes with flange width equal to or greater than 6 inches	All	$\frac{1/8" \times \text{total length (in feet)}}{10}$	$\frac{1/8" \times \text{total length (in feet)}}{5}$
Certain sections with flange width approximately equal to depth & specified on order as columns	45 Ft. and Under	$\frac{1/8" \times \text{total length (in feet)}}{10}$	(with 3/8" max)
	Over 45 Ft.	$3/8" + \frac{1/8" \times \text{total length (in feet)}}{10}$	

### OTHER TOLERANCES FOR H-PILE & WIDE FLANGE

<b>Variation in Weight</b> ± 2.5% of theoretical or published weight	<b>Ends out of Square</b> 1/64" per inch of depth, or flange width if it is greater than depth
---	---

### OTHER TOLERANCES FOR STANDARD & CHANNEL

<b>Variation in Weight</b> ± 2.5% of theoretical or published weight	<b>Ends out of Square</b> 1/64" per inch of depth, or flange width if it is greater than depth
<b>Camber</b> $\frac{1/8" \times \text{total length (in feet)}}{5}$	<b>Sweep</b> $\frac{1/4" \times \text{total length (in feet)}}{5}$

# R.W. CONKLINSTEEL


100% Melted & Manufactured in the USA

1-888-CONKLIN (266-5546)

www.conklinsteel.com

# PERMISSIBLE VARIATIONS

Angles

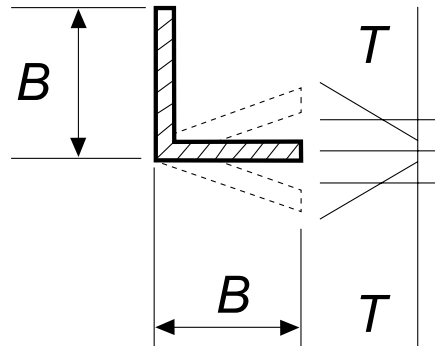

## PERMISSIBLE VARIATIONS IN CROSS SECTION


Nominal Size	Depth (A)		Flange Width (B)		T	E
	OVER THEORETICAL	UNDER THEORETICAL	OVER THEORETICAL	UNDER THEORETICAL	FLANGES OUT OF SQ. MAX	WEB OFF CENTER MAX
<b>L Angles</b> 3 - 4 (including 4)	—	—	1/8-inch	3/32-inch	3/128-inch*	—
	—	—	1/8-inch	1/8-inch	3/128-inch*	—
	—	—	3/16-inch	1-8-inch	3/128-inch*	—

\* 3/128-inch per inch = 1 1/2 degrees.

## PERMISSIBLE VARIATIONS IN LENGTH

### Variations from Specified Length for Lengths Given

	UP TO 30 FT (with 30 ft included)	OVER 30 FT TO 40 FT (with 40 ft included)	OVER 40 FT TO 50 FT (with 50 ft included)	OVER 50 FT TO 65 FT (with 65 ft included)	OVER 65 FT (with 40 ft included)
	OVER THEORETICAL	OVER THEORETICAL	OVER THEORETICAL	OVER THEORETICAL	OVER THEORETICAL
<b>L Angles</b>	1/2-inch	3/4-inch	1-inch	1 1/8-inch	1 1/4-inch
	UNDER THEORETICAL	UNDER THEORETICAL	UNDER THEORETICAL	UNDER THEORETICAL	UNDER THEORETICAL
<b>L Angles</b>	1/4-inch	1/4-inch	1/4-inch	1/4-inch	1/4-inch



## STRAIGHTNESS

### Permissible Variations in Inches

CAMBER
$1/8" \times \frac{\text{total length (in feet)}}{5}$

HORIZONTAL SURFACE



Sweep tolerances are subject to negotiation for the individual shapes involved.

# R.W. CONKLINSTEEL

100% Melted & Manufactured in the USA


1-888-CONKLIN (266-5546)

www.conklinsteel.com


# PERMISSIBLE VARIATIONS

Structural Tees


**GENERALLY, ANY W OR S SHAPE FROM 6 TO 36 INCHES IN DEPTH CAN BE SPLIT TO FORM TEES**



Center Splitting



Off-Center Splitting



Two Lines of Cut

Nominal W-Shape Depth in Inches	Variation from Tee Depth Over and Under in Inches
6 to 16 inches (excluding 16)	3/16"
16 to 20 inches (excluding 20)	1/4"
20 to 24 inches (excluding 24)	5/16"
24 inches and Over	3/8"

*All weight, length and ends out of square variations for split tees are the same as those applicable to the shape from which the tees are split.*

## STRAIGHTNESS

### Permissible Variations in Inches

#### CAMBER

$$1/8" \times \frac{\text{total length (in feet)}}{5}$$